


BASKET FAN

RE-CIRCULATION



Features

Comes with hot dip galvanized standard mounting bracket • OSHA approved guard for installations below and above 7' (2.13 m) • Corrosion resistant powder coated guards • Variable speed motors on select models • Maintenance free direct drive, high efficiency motors has completely sealed ball bearings, UL, ULC and CE certification • 1 year warranty on all parts

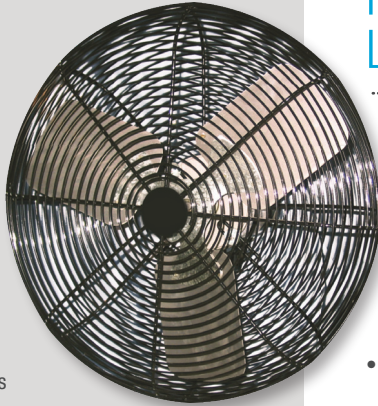

HIGHT OUTPUT PERFORMANCE, LOW COST!

Our Deluxe Basket Fan Series combines high output performance, low cost and maintenance and energy efficiency to give you one of our best valued fan series. It gives a high velocity air pattern with quiet operation.

when applied properly Maxum circulation fans can be used in the following applications:

- Air de-stratification reduces heating and cooling bills
- Air exchange when placed in a wall opening or in open sidewall buildings
- Consistent air temperature throughout a room, building or barn
- Heat stress relief indoors and outdoors for young and old
- Surface drying (including animal bedding)
- People and animal cooling
- Machine/compressor cooling
- High velocity air cooling
- Insect control

SIZE	DRIVE	HP (KW)	VOLT	PH	AMP	RPM	HZ	CFM (M ³ H) 0" SP	CFM/WATT (M ³ H/WATT) 0" SP	FPM (KM/H) @ 50' (15 M)	FPM (KM/H) @ 100' (30 M)	BLADE	CORD *	WEIGHT	SPEED
12" (30 CM)	DD	1/10 (0.07 KW)	115/230	1	1.42/0.77	1 725	50/60	1 600 (2 719 M ³ H)	16 (27 M ³ H)	200 (3.7 KM)	50 (0.9 KM)	3-ALUM.	9' (2.74 M)	21.75 (9.86 KG)	VARIABLE
20" (51 CM)	DD	1/3 (0.25 KW)	115/230	1	4.3/2.16	1 725	50/60	6 400 (10 874 M ³ H)	17 (29 M ³ H)	450 (8.2 KM)	150 (2.7 KM)	3-ALUM.	9' (2.74 M)	36.5 (16.55 KG)	VARIABLE
24" (61 CM)	DD	1/2 (0.37 KW)	115/230	1	5.2/2.8	1 725	50/60	8 800 (14 952 M ³ H)	18 (31 M ³ H)	550 (10.1 KM)	200 (3.7 KM)	3-ALUM.	9' (2.74 M)	46.5 (21.09 KG)	VARIABLE
36" (91 CM)	DD	1/2 (0.37 KW)	115/230	1	6.1/3.09	825	50/60	14 000 (23 787 M ³ H)	26 (37 M ³ H)	700 (12.8 KM)	350 (6.4 KM)	3-GALV.	N/A	65 (29.48 KG)	SINGLE

* The supplied power cord is only useful on 115 Volt. Remove the cord if used on 230 Volt.



Maxum Technologies Inc.
4050, blvd Casavant West • St-Hyacinthe (Quebec) Canada • J2S 8E3
P. 1 450 771.2540 • F. 1 450 771.5779 • info@maxumtech.com

Distributed by:

maxumtech.com